

09-19-00
ASSISTANT COMMISSIONER FOR PATENTS
BOX PATENT APPLICATION
Washington, D.C. 20231

DOCKET NO. YOR920000633US1
Date: September 18, 2000

Sir:

09/18/00

Transmitted herewith for filing is the Patent Application of:

Inventors: Robert Ellis Chapman, Jr., Edith Helen Stern,
Barry E. Willner

For: WIRELESS COMMUNICATIONS DEVICE AND METHOD FOR USE WITH TELEPHONE
NETWORK EDGE NODE PROVIDING BRIDGING AND PRIVACY

Enclosed are:

- ☒ 15 Sheets of Informal Drawings.
- ☒ An assignment of the invention to International Business Machines Corporation, Armonk, New York 10504.
- ☒ A certified copy of a _____ application.
- ☒ Executed Declaration and Power of Attorney is attached to the application.
- ☒ Associate Power of Attorney.
- ☒ Information Disclosure Statement with form PTO-1449 with references attached.

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	9 - 20 =	0
INDEP CLAIMS	6 - 3 =	3
____ MULTIPLE DEPENDENT CLAIM PRESENTED		

If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

OTHER THAN A
SMALL ENTITY

RATE	FEE
	\$ 690.00
X \$ 18 =	\$ 0.00
X \$ 78 =	\$ 234.00
+ \$ 260 =	\$ 0.00
TOTAL	\$ 924.00

- ☒ Please charge my Deposit Account No. 09-0468 in the amount of \$ 924.00.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 09-0468. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 35 CFR 1.17.

Respectfully submitted,

By

Louis J. Percello
Louis J. Percello
Registration No.: 33,206
Tel. (614) 945-3145

IBM CORPORATION
INTELLECTUAL PROPERTY LAW DEPT.
P.O. BOX 218
YORKTOWN HEIGHTS, NY 10598

Express Label EL677441408US
Date of Deposit: Sept. 18, 2000

**WIRELESS COMMUNICATIONS DEVICE AND METHOD FOR USE WITH
TELEPHONE NETWORK EDGE NODE PROVIDING BRIDGING AND PRIVACY**

FIELD OF THE INVENTION

This invention relates to connecting a network to one or more radio frequency channels. More specifically, the invention relates to connecting a telephone network to one or more radio frequency channels.

BACKGROUND OF THE INVENTION

Refer to Figure 1. The use of telephone service has dramatically increased as a result of the popularity of the Internet. In addition to a single telephone line for voice conversation, it is increasingly common to find homes with multiple phone lines 135, so that the second line can be used for business or for Internet access.

Wire line residential phone service essentially means connecting a twisted pair of wires 110 originating in the central office of the telephone company to a physical wired circuit, connected to a number of wired phones in the residence 115. These twisted pairs are packaged in bundles of up to several thousand wires, attached to a switch through a wiring frame in the central office and these large bundles are then attached from telephone pole 120 to telephone pole through the neighborhoods. Outside a given residence the particular pair of wires that provide service to that

residence is exited from the bundle and brought to the house, where it is attached to the in-house wiring. Once the twisted pair is attached to the in-house wiring, it may be connected to a traditional, wired telephone 125 , as is manufactured by Southwestern Bell, GE or Sony.

Cordless phones are terminal devices attached to the existing land line (wired) networks of today.

5 Two devices comprise a cordless phone 130: a base unit and a handset. The base unit connects directly to one or two wired lines of the existing network and extends them by radio to the handset. The cordless phone provides total transparency, viz: the land line network does not know that it is terminated in a cordless phone rather than a traditional wired telephone set. The base unit's main functions are to provide a full-duplex audio channel between the land line and the handset, and an interface between the wired network signaling and appropriate devices in the handset such as the switch hook, the bell (alerting device), and the dial pad. Various methods are used in cordless phones to provide security, meaning protection against unauthorized use of the land line channels, and privacy, meaning protection from eavesdropping. Cordless phones are typically sold in base-handset pairs which can be set to one of several code-patterns by the consumer, usually by means of a multi-contact switch bank. The radio-frequency sections of cordless phones are low-power and with the exception of high-end units which use spread-spectrum frequency-hopping techniques as a security means, they are not frequency-agile, meaning they do not change frequency during a call. In particular, cordless phones do not use frequency agility as a means of improving the switching functions or services of the networks to which they are connected.

10
15
20

Cellular telephone systems, while cordless, are substantially different from cordless telephone sets. Cellular telephone handsets are both frequency-mobile and power-mobile, and are constantly supervised by the cell controller. They use many more frequencies than cordless telephones. The fundamental feature of cellular systems is to provide mobility of the handsets over wide areas, even hundreds of miles. It is not possible to provide sufficient RF power to cover wide areas, and there are insufficient assigned frequencies to serve the number of users on a frequency-per-user basis. As a result, cellular telephony divides all geography into relatively small "cells", each with a central antenna 140, using a subset of all frequencies, allowing low-power communications with handsets 145, inside the cell boundary. Each cell adjacent to a given cell will use a different subset of frequencies (146,147), and cells a short distance away can reuse the same frequencies because of the low RF power used in the cells. The control system for cellular telephone systems is extremely complex. Each cell controller continually monitors the signal strength of all handsets in its own cell and in adjacent cells, so when a handset moves into the boundary between two cells, both cell controllers know where the handset is and in what direction it is moving. At the appropriate moment a "hand-off" occurs during which the cell controllers instruct the handset to change to a frequency that is used in the cell it is entering. At the same time the land line connection is changed from the old cell to the new cell, providing continuity for the voice connection.

To provide wireless data access in well trafficked areas such as hotels and airports, firms such as MobileStar (<http://www.mobilestar.com>) provide publicly accessible wireless LANs. These allow subscribers, equipped with the appropriate passwords, hardware and software for their laptops, to communicate through wireless LAN techniques, and through a gateway and router to their

corporate LANs and the Internet. The wireless access point in the airport or hotel is generally provisioned with a broadband (T1 or above) wired channel to the network. These facilities are shared rather than dedicated, with the routers functioning to transfer packets to their appropriate destinations.

5 PROBLEMS WITH THE PRIOR ART

Installation and maintenance of traditional wired telephony service from the pole or post to the structure and then within the structure to the telephone instrument(s) is a labor intensive operation. To install service it is necessary to dispatch personnel to the site. When service failures occur it is also often necessary to dispatch maintenance personnel ("roll the truck") to the house in order to examine the wiring, and repair it. This is expensive, time consuming and requires coordination with the residents to ensure that someone will be home.

To provide standard wired telephone service, outside a given residence the particular pair of wires that provide service to that residence is exited from the bundle and brought to the house, where it is attached to the in-house wiring. When additional service is required previously unused pairs must be employed. If there is not an unused pair which has already been brought to the house from the bundle, then an additional pair must be brought in. Again this requires maintenance personnel, on-site labor, and coordination with the residents. If there are no unused pairs available to bring to the house, this can cause significant delay to the resident requesting the new service, and expense to the telephone company which may have to provide new capacity to the area.

This dedicated resource service design has disadvantages for the carrier as well. Despite high demand, the carrier cannot easily offer additional services such as shared lines, temporary excess capacity, and new subscriber access. The carrier cannot extend even best effort services to users desiring it. In an area where many twisted pairs may be temporarily idle, the carrier cannot use
5 them to offer service since they are dedicated to absent users.

Cellular telephony has the advantage that no wires need be run to the neighborhoods at all, let alone the home. Cellular does not allow for the adhoc addition of outbound or inbound connections. Additionally, cellular uses a relatively rare and regulated resource - frequency spectrum, which does not exist in unlimited quantities. In many jurisdictions the local exchange
10 carrier will not be able to offer this service, without a cellular license.

Telephone service in the local neighborhood has not allowed for flexible business arrangements. Service has been on a dedicated line basis, or in past years, on a party line basis as mediated by the good conduct of neighbors. Life line services (i.e. services with high reliability that are always there, like "911"), and non life line (i.e. services that might not always be available, e.g. on power
15 surges) billing models have not been offered. Such services as the following have not been enabled:

- 1) multiple simultaneous call capability (e.g. different calls to different phones within a household) with only one phone number, both inbound and outbound.

- 2) best efforts telephone connections based on availability of one of a pool of lines back to the central office.
- 3) auctioning for available telephone resource.
- 4) premiere or gold services (e.g. next available line, or ability to interrupt existing conversations).

OBJECTS OF THE INVENTION

An object of this invention is an improved apparatus, system, and method for connecting a network to one or more radio frequency channels.

An object of this invention is an improved apparatus, system, and method to enable multiple simultaneous call capability (e.g. different calls to different phones within a household) with only one phone number, both inbound and outbound.

An object of this invention is an improved apparatus, system, and method to enable multiple simultaneous call capability with privacy.

An object of this invention is an improved apparatus, system, and method to enable premiere services (e.g. next available line, or ability to interrupt existing conversations).

SUMMARY OF THE INVENTION

A wireless device connects to one or more network node devices that are in turn connected to one or more wirelines. The wireless device has one or more wireless signal generators supporting one or more of the wireless connections and one or more memories to store an identifier. One or
5 more negotiators negotiate with the network node device in order to establish a connection to one or more wirelines connected to the network node and a requesting process requests bridging to a call in progress.

BRIEF DESCRIPTION OF THE FIGURES

The foregoing and other objects, aspects, and advantages will be better understood from the
10 following non limiting detailed description of preferred embodiments of the invention with reference to the drawings that include the following:

Figure 1 is a block diagram of the prior art.

Figure 2 is a block diagram of a system of network nodes and wireless communication devices.

Figure 3 is a block diagram of the Network Node Controller which connects the intelligent
15 network to the inventive system

Figure 4 is a block diagram of the telephone Network Node Device.

Figure 5 is a block diagram of the Wireless Communications Device.

Figure 6 is a flow diagram of the communication between the Network Node Controller and the Network Node device initiated by the controller.

5 Figure 7 is a flow diagram of the communication between the Network Node Controller and the Network Node device initiated by the Network Node.

Figure 8 is a flow diagram of the initial setup of the PIN into the Network Node and the Wireless Communications Device

10 Figure 9 is a diagram of the outgoing connection process from the Wireless Communication Device to the Network Node.

Figure 10 is a diagram of the incoming connection process from the Network Node to the Wireless Communication Device.

Figure 11 is a depiction of the elements of a class of service table associated with a PIN number in the Network Node.

15 Figure 12 is a depiction of the line assignment table in the Network Node.

Figure 13 is a flowchart of the privacy process covering what happens in the wireless communications chart and in the network node command channel when privacy is requested for a call.

Figure 14 is a continuation of the privacy process covering what happens in the network node

5 incoming call handler when a privacy request is received.

Figure 15 covers the outgoing call process in the network node as it handles privacy.

DETAILED DESCRIPTION OF THE INVENTION

Refer to Figure 2. The system 200 comprises multiple wireless communications devices 205, most of which will be wireless handsets similar in appearance to present-day cordless telephones, although they may also be made in stationary versions which provide speakerphone functions, and versions which provide the function of modems. Numbers of wireless communication devices connect by radio or other emissions (laser, infrared light, etc.) to nearby Network Nodes 250 over short distances (in one preferred embodiment about 300 meters/1000 feet). The network nodes provide the connection between the wireless devices and groups of telephone landlines 260 which extend from the node 250 to a telephone central office. There are several classes of telephone landlines 260:

1. Associated lines are identical to ordinary two-way central office lines, and typically have a telephone number associated with them.

2. Unassociated lines are incoming-only to the telephone office (outgoing from the network node) and can be temporarily associated with any wireless device.

3. Shared lines, which are outgoing from the telephone office (incoming to the network node) and can serve multiple wireless devices. These are essentially ground-start PBX trunks on which the central office communicates to the network node the desired destination with DTMF tones.

4. Data lines, which allow the network node to communicate with Network Node Controllers in the telephone office. Data lines can be dedicated wires or can be "derived" by data-under-voice techniques applied to either associated or unassociated wire-pairs. Data lines are used to deliver operating data and programs to the network nodes 250, including the PIN 255 numbers of the wireless communication devices 205 authorized to interact with the node 250 and the "class of service" values associated with each PIN, which describe which optional features each PIN-bearing device may use.

The PINs and class-of-service marks 256 are stored in the nonvolatile storage of the network node 250. In the preferred embodiment, classes of services supported include dedicated line service, shared incoming line service, shared outgoing line service, bridging and privacy. Refer to Figure 11 for one possible arrangement of a database table relating a PIN to a number of class-of-service marks. While each individual wireless device will typically contain one unique

PIN, we do not prohibit the sharing of a PIN among multiple handsets, making them interchangeable and indistinguishable to the node, nor the application of more than one PIN within a handset, creating a multi-user set.

The PIN number 255 identifies the handset 205 to the Network Node 250, and the node 5 250 uses the PIN of a handset requesting any service to determine if the handset is authorized to receive that service. In a preferred embodiment, as a critical identifier, the PIN is not sent in the clear, it is encrypted. In the preferred embodiment, the handset is manufactured without a PIN, but with the ability to receive a PIN either via it being entered on the keypad, or by receiving it encoded on an installable nonvolatile storage device, e.g. a memory stick or PCMCIA memory 10 card. The advantage to the removable media approach is accuracy by eliminating human number-entry, and quick transfer of the PIN to a different handset should the original unit fail. In some embodiments, the PIN 255 can be provided to the handset 205 through the node 250. An alternate embodiment is that the wireless device is manufactured with a unique hardware identifier.

15 Referring to Figure 8, one preferred process of obtaining the PIN is as follows: The user purchases the handset from any retailer. The user contacts the telephone carrier 801, serving the location where the handset will be used, typically a business or residence, by telephone, mail, or the Internet. The carrier assigns the PIN, and creates a class-of-service database based on the subscriber's order for features, 802. The carrier provides the PIN to the user by telephone, mail or 20 Internet, which the user installs by keystrokes 803a, or by the shipping of a removable storage device containing the PIN, which the user installs by inserting the device into the handset, 803b.

The telephone carrier assigns 805 one or more land telephone lines to the PIN, or to a group of PINs (representing a group of extension telephones). This association of PIN(s) with telephone line(s) is stored by the carrier in the nonvolatile storage of the Network Node Controller 350. The telephone carrier also downloads the PIN and class of service information to the network node
5 250 which will serve the user, typically the node nearest the user's permanent location 804.

Depending on the service offering, the carrier may download the PIN into more than one network node, e.g. all the nodes on a campus. In the case of a hardware PIN, the process is similar except that the user provides the PIN of the wireless device to the carrier and the carrier uses that number.

10 Refer to Figure 3. Multiple Network Node 250 devices are administered by one or more Node Controllers 350 located in the premises of the telephone service provider 310. As shown in Figure 3, they are general purpose computers (servers) which may be connected to the nodes 250 by switched telephone lines (260, 360), or they may be connected by dedicated lines (260, 365), bypassing the switch element 315. The controllers 350 keep the PIN numbers 255, classes of
15 service 256 associated with PINs, PIN Group lists 355 and node logical addresses 320, and can download the information 375 to the node 250 as required. They also receive alarms, statistics, and billing data and other node information 370 from the nodes. Connection to individual nodes may be periodic 360 or by a dedicated 365 line. When connected by a dedicated line, the node controller may be used as the grantor of all service permissions within the nodes, reducing reliance
20 on the node storage. Network Node Controllers communicate with the Network Nodes using modem signaling, data-under voice techniques, or DTMF tones depending on the type of data line or other requirements.

As shown in Figure 6 and Figure 7 below, the Network Node Controller 350 normally initiates downloads of configuration and database 601, while the Network Node normally initiates uploads of billing, traffic, and alarm information 370, 701. Each entity, however, will have the ability to initiate any kind of transaction. For example should the Network Node discover a corruption in its database it will request a new download 375 from the Controller using a process like that described in 602, which will initiate the usual download 601. Likewise a Network Node Controller may use process 702 to initiate the download of alarms and bills when certain software triggers occur.

The purpose of the Wireless Communication Device (handset) 205W is to provide wireless speech or data communication to a wireless network node 250. Figure 5 shows the components of the wireless device 205W, which in a preferred embodiment, may have three different configurations depending on the principal user interface: Hand held configuration A, Desktop Speaker Phone configuration B, and desktop data terminal configuration C. The data output components may also be included in either configuration A for use with portable data devices, or B for a combination desktop unit. In Figure 5, capital A indicates optional connections for configuration A, capital B for configuration B, etc..

One "key" to the use of the device is the PIN number. The possession of a valid PIN authorizes the device to communicate with the pole-mounted network node, and reveals which optional services the client device is authorized to use. The client can obtain the PIN number by communication with the service provider, which provides the number either by voice

communication (over the telephone), by mail, by communication over the Internet, or by providing a removable storage device with the PIN number pre installed. In the cases of the client obtaining an actual number, the client will use the keypad, 528, to install the PIN into the device, where it will reside in nonvolatile storage, 506.

5 All operations are controlled by the processor, 502, which connects by a data bus, 550, to all functional components. The processor employs three types of storage: volatile storage, 504, for temporary functions, nonvolatile storage, 506, for the computer control code and other information which must be kept when the power is off, and removable storage, 508, which may be any kind of removable storage, including plug-in PROM, Stick Memory, PCMCIA configuration
10 storage card, Smart Card, etc.

Speech is received and transmitted by a loudspeaker and microphone in a handset, 520, or by the amplified loudspeaker and microphone in the speaker phone function, 522. Analog speech signals from 520, 522 are converted to digital signals in the codec, 518, optionally encrypted by the encryption function, 516, converted to radio-frequency signals by the transmitter/receiver,
15 512, and transmitted via a built-in antenna, 540. The frequency control unit, 510, determines which of the several radio frequencies the wireless device will use for a given call. In a preferred embodiment, each frequency selection consists of a fixed pair of frequencies, outbound for the transmitter and inbound for the receiver.

The data configurations include a data connector, 526, which allows connection of
20 standard computer data ports to the data interface function, 524. Digital signals from the

computer bypass the audio functions (connection C) and are connected to the encryptor for eventual wireless transmission as described above.

A keypad, 528, provides human-processor communication for entering the PIN, selecting functions to be used, etc., and also provides number-entry for outbound calls. Number-entry may
5 be in the form of abbreviated codes which the processor translates into full digit strings.

When in a speech configuration, A or B, the processor alerts the user to incoming calls with the alerting device, 530, which typically is a bell or other audible signaling device. In the data configuration, C, the processor causes the data interface, 524, to change the state of the ring indicator lead to indicate an incoming call.

Before an incoming or outgoing call can take place, the wireless device and the network
10 node must coordinate certain variables such as authorization, which radio frequency to use, etc. This coordination is done by means of the command channel, for which there is a dedicated command channel transceiver, 514. As there may be more than one command channel frequency, the transceiver is controlled by the frequency control unit, 510, which generates radio frequency
15 carriers under processor control. During a call the command channel may be used to signal the desire of the user for additional features such as three-way calling, or to accept incoming requests such a call waiting.

In the hand held configuration the unit is powered by an internal battery, 532, which is
20 occasionally recharged by placing the unit into a charger base containing an AC powered battery

charger, 534. In the desk top configurations the unit contains an AC operated power supply, 536, which plugs into local power mains.

Figure 4 shows the components of the network node 250. The network node provides a wireless connection between a number of land telephone lines and a number of instances of the
5 wireless communication devices (handsets) (205, 205W) in a way that provides service like that which would be obtained if the handsets were connected to the land lines by physical wires.

The network node is connected to a number of two-wire analog telephone lines, 409, which originate in a telephone central office switch or its equivalent. The lines are physically similar but are in three logical classes: 1) Two-way lines associated with service to a specific
10 handset or group of handsets, 2) Outgoing lines which may be assigned to any handset to provide outgoing service, and 3) lines dedicated to data communication between the central office and the network node for control, administration, and maintenance.

The incoming call detector, 410, detects ring voltage on the telephone line and alerts the processor that service is required on the line.

15 The line termination, 412, provides a processor-controlled d.c.shunt across the telephone line. On incoming calls the central office sees this as a telephone being answered and will stop ringing and connect the voice path to the caller. On outgoing calls the central office sees this as a telephone going "off hook" and will provide dial tone. The shunt termination has high a.c. impedance so that voice frequency signals pass through with little attenuation. The termination

includes a dc current detector so that signaling from the central office in the form of loop interruptions can be detected by the processor. This allows the processor to detect calling-party disconnection in central offices that provide a "wink down" signal.

The codec (coder-decoder), 414, converts the analog signals on the telephone line into
5 digital signals which may be more easily processed in the node.

The switch, 416, which may be a non blocking, any-to-any cross point switch or a bus technology, provides flexible interconnection among the telephone lines and the radio frequency assets of the node, and allows the tone generators and conference bridges, which are not needed on every call, to be pooled and inserted into calls where necessary.

The optional encryptor/decryptor, 418, provides encryption of the digital signal coming
10 from the codec (codec outputs are recognized standard formats) to ensure privacy to the users from eavesdropping in the radio frequency domain.

The transmitter/receiver, 420, converts the digital speech signal into radio frequency signals for broadcast to the handset. The receiver also monitors rf carrier received from the
15 handset and notifies the processor if it should be lost. One transmitter/receiver set is required for each handset in use.

The frequency control function, 422, allows the processor to select the radio frequency channel to be used by each radio frequency device in the node.

Conference bridges, 424, allow the processor to connect one or more telephone lines to one or more radio frequency links and provides the ability for the three or more parties so connected to converse normally. This allows extension telephones and conference calls. Because the handsets may not conference speech by transmitting and receiving on the same radio
5 frequencies, the bridge provides the necessary signal combining.

The tone generator, 426, allows the processor to send (through the switch function) signaling tones to selected telephone lines for call control.

The processor may connect the data interface, 428, to a telephone line to communicate with external servers for the purpose of delivering maintenance information and alarms to a
10 central maintenance function, call records to a central billing system, and for receiving databases or updates to databases, and computer programs or updates to computer programs.

The command transceiver, 430 provides a special radio frequency link to all the handsets (205, 205W) served by a particular network node device 250. The processor and the handsets use this link to initiate all calls and to interrupt/reconfigure calls in progress. Special identity codes
15 (PINs) in the short data messages on this link allow each device to recognize the intended recipient of the messages.

The radio frequency transmitters and receivers are connected to a common antenna, 440, and optionally to an auxiliary space-diversity antenna, 444.

establish the node to handset frequency to be used. The processor will transmit a code on that frequency 1007, and look for the code to come back on the receiver 1008, indicating the handset is tuned properly and that two way voice communication will be successful.

When communication is established with the handset 1009, the processor causes the line termination unit, 412, to place a d.c shunt across the telephone line, which causes the telephone central office to stop ringing and connect the calling party's voice path through to the line. Voice frequency signals will pass through the line termination unit to the codec, 414, and the digital output of the codec will be connected via the switch function, 416, to the encryptor, 418, associated with the selected transceiver, 420. The transceiver converts the voice to radio frequencies which are broadcast by the common antenna, 440, 444, to complementary functions in the handset.

The carrier may associate more than one telephone line with a given PIN, or in the more general case it may associate more telephone lines with a PIN group than there are PINs in the group. This may be done by establishing a rotary group at the central office, or by assigning multiple telephone numbers to a PIN.

In any case it may be that a call arrives at the network node 250 when all associated PINs are engaged on other lines. When the processor indexes the line termination unit into its database it obtains the PIN(s) associated with the line. In a preferred embodiment, upon determining that all associated handsets are busy, the processor will momentarily break the inbound speech path of one or more connected handsets, and connect them momentarily to the tone generator, causing a

request, and if so, which existing call the user is authorized to join. It then checks to see if the present user on the call has a privacy code in the database (see next paragraph). If there is no privacy block, it selects an idle transceiver (an additional instance of 420) and frequency pair, transmits the frequency information to the joining handset via the command transceiver, 430, and
5 executes a negotiation as described above. Once the radio connection is established, the processor uses the switch, 416, to divert the codec output to an idle conference bridge function, 424, to which it also connects both the original encryptor, 418, and the encryptor associated with the joining transceiver. The three parties can then engage in a call as if both handsets were extensions in a wired environment. A tone spurt may be generated by the tone generator and injected toward
10 the original party(ies) to inform them that someone has joined the call.

For a flow chart of the "private" and "privacy disconnect" functions see Figures 13, 14, and 15. Extension telephones may represent a violation of privacy if used without the knowledge and consent of other parties on the call. The invention includes the ability of the wireless handset user to press a "private" key either during or before engaging in a call, 1301. The output of this
15 key will cause the wireless handset to send a "private" message 1302 via the command channel 1303, to the wireless network node device 1305, where a privacy attribute may be stored in the database associated with the wireless handset's PIN, 1310. Step 1304 insures that the network node responds. If not, step 1303 is repeated. Step 1306 checks if the request is a privacy request. The attribute will only be stored if the PIN database includes authority to do so, as this
20 feature may be optional. If engaged in a call 1307 when the key is pressed and the message recorded in the database, the network node may place a confirmation tone 1309 on the speech

path to the handset, assuming the requesting PIN Group is idle 1308. If the PIN Group is not idle, control is passed to step 1311.

Step 1311 checks if the requesting PIN's privacy priority is greater than that of the pins in use. If it is, the PIN in use is disconnected 1312, the prior in use is connected to a drop tone 1313, and then set to an idle state 1314. If the priority in step 1311 is less than the PIN in use, then the requesting PIN is disconnected 1315, the connect requesting PIN is placed to a rejection tone 1316, and the requesting PIN is reconnected to the conversation 1317.

Privacy modifies the incoming call process as described in Figure 14. In a single PIN environment 1401, this process is by passed. In a multi-PIN environment 1401 an incoming call will be delivered only to the highest-priority (1404) PIN which has a "privacy" attribute active (1402) in its database that are selected 1403. In step 1405, flags are set to ring the single PIN.

An outgoing call process, typically executed in the network node is shown in Figure 15. First an off-hook request is received 1501 from a command channel. A check 1502 is done to see if all lines are in use. If not, the process is skipped and outgoing calls continue being processed. If all lines are in use, step 1503 requests if the PIN has a privacy disconnect. If not, a "Line in Use" message is sent to the handset 1508. If there is a privacy disconnect, other PINs on the line are disconnected 1504, a drop tone is sent to disconnected PIN(s) 1505, and the land line is set to IDLE.

When a join request is made 1509 to the node, a check is made to see if the land line is in use 1510. If the land line is not in use, the erroneous JOIN is treated as an OFF HOOK request 1511.

If the line is in use, the process checks if the privacy mode is set for the PIN group 1510A. If the
5 privacy is not set, the BRIDGE TO EXISTING CALL FLAG is set 1515. (This flag tells the processor not to try to establish a new radio call, but only to bridge the user to a call already in existence.) The outgoing calls continue to be processed as usual. If the privacy is set, the process checks for the presence of a privacy attribute for the handset already in use 1512, i.e., does the
10 PIN have priority greater than or equal to PINs with the privacy set active 1512. If the attribute is found, e.g., if the PIN has a priority less than the priority of PINs with an privacy set active, the process will not allow the requesting party to join the call 1514. This is done by sending a Privacy Reject message to the requesting handset via the command channel.

A member of a PIN group, the members of which share access to one or more telephone lines, may want to place a new call, rather than attempt to join a call in progress, or the new user may
15 be prevented from joining due to privacy request on the call in progress. If no telephone line is available for the new user, the user's PIN may include authority to "camp on" and wait for an available line. The user presses a key combination indicating a desire to camp on, which is translated by the handset processor. The processor sends via the command channel a message to the network node indicating that the sending PIN should be notified when an authorized line
20 becomes available. The node processor will place a mark on the lines in use (that the camping on party is eligible to use) so that when the first such line becomes idle, the node will alert the camped PIN as if a new call were arriving for it. This process is identical to the incoming call

process described above. When the camped handset answers, the node will connect it to the telephone line, which will provide dial tone and allow the handset to place an outgoing call. If more than one PIN camps on to a (group of) busy lines, the allocation of lines as they become idle may be random, first-come-first-served, or a camp-on priority may be included in the class of service of each PIN so that certain PINs always have first choice of idle lines.

An additional function, privacy disconnect, is permitted. This constitutes the releasing of all other joined parties from the call if privacy is requested by a party on the call. If a particular handset did not have privacy established when it began a call, other authorized parties may have joined the call. To regain privacy, a handset user may press the privacy key 1301, sending a message to the network node via the command channel 1305. The processor will check the handset's PIN to determine if this function is permitted and if permitted it will release the other parties to the call 1312, freeing the conference bridge in use and returning to a direct codec-to-encryptor connection via the switch. The authority to drop calls, as contained in the PIN database, may be simple, as in anyone can drop anyone else, or may be hierarchical as in level 1 may drop all other levels, level 2 may drop only lower levels of authority, etc. 1311. An alternate procedure may be that another key "privacy disconnect" may be defined on the wireless handset keypad, and only this key, not the basic "privacy" key may cause disconnects. The privacy key would send a unique "privacy disconnect" message via the command channel to initiate the disconnect procedure described above. The term 'key' as used above may include keystroke combinations as well as single key actuations. It will also be possible to include in a PIN's class-of service the right to preempt calls in progress when the handset using that PIN requests an outgoing call 1501-

1506. The process is essentially an automatic privacy disconnect that operates as soon as the PIN's class of service is determined by the node processor.

Note that outgoing calls are further described in the flow diagram of Figure 9. The user initiates a call by pressing a keypad key to request service. The handset processor decodes the key and sends a "call request" message containing the PIN via the handset command transceiver, 514, 901 to the network node command transceiver, 430. The call request message contains only the encrypted PIN and a code to indicate which type of call is being requested, e.g. "New Call", or "Join". The network node processor translates the message and checks the class of service marks associated with the requesting PIN. If the class of service indicates that the requesting PIN is authorized to make the requested outgoing call 902, the node processor selects an idle transceiver, 420, and frequency pair, and begins to transmit the requester's PIN through the encryptor, 418, and transceiver, 420, 903. The handset scans receiver frequencies 904, and when it finds its own PIN, loops the signal back to its transmitter which broadcasts the looped signal back to the node receiver, 905. The node monitors the expected return frequency and when it finds the requester's PIN coming back it accepts the negotiated channel as working properly, and can proceed with making the connection to the telephone line, or another service as requested, 906. This handshake establishes the frequencies and checks the voice path without using the command channel. When the radio path is established the processor uses tables in storage to relate the calling PIN with a land telephone line. It seizes the line (goes 'off hook') by instructing the line termination to apply the d.c. shunt across the line. The central office responds with dial tone. Dial tone is passed to the codec, 414, and via the switch, 416, to the encryptor, 418, associated with the previously selected transceiver, 420, and over the antenna, 440, 444, to complementary

functions in the handset. The user hears dial tone and presses keys on the handset which generate audible tones (DTMF) which are carried over the outgoing voice path to the telephone central office, which completes the call. The processor may or may not create a call record for connecting a wireless device to its dedicated line(s) depending on whether the telephone carrier
5 uses flat-rate or message-rate billing.

Each group of PINs (handsets) have at least one telephone line (dedicated, shared, or both) associated with it for incoming calls. A line assigned to a single PIN represents a guaranteed line to that PIN, as no other PIN can use it. This invention can also provide additional outgoing lines to a PIN group so that if one handset is using the associated line, another handset can make
10 an outgoing call via one of a pool of unassociated land lines connected to the node. The procedure is similar to that for an outgoing call, above, except that the processor checks for authority to add a line and if it is allowed by the class of service database, any idle unassociated land line, 409, will be selected for use. The processor will generate a call record which may result in a per-use bill to the user for this feature. It will be possible, through class-of-service marks, to
15 limit the number of concurrent calls any PIN group may use, so that the shared resource represented by the set of outgoing lines may be fairly made available to all. Thus varying degrees of next-available service may be provided. It is also possible for the carrier to dedicate one or more outgoing lines to a specific PIN, providing a guaranteed number of bridged calls. This concept can be extended to include a priority system for assigning the idle lines, in which the
20 processor compares the priority of any requesting user with a priority associated with an idle line, and only proceeding if the requester's priority matches that of the line. In addition a preemption priority system may be provided for allowing certain PINs to capture lines in use from PINs with

lower priorities. Once a line is captured by a member of a PIN group, any other authorized features, such as join, privacy, privacy disconnect, etc., will be available to the other members of the group.

The physical facilities between the telephone switch and the network node may include

5 trunks as well as lines. This allows the network node to take advantage of certain enhanced services available in the central office switch and allow multiple wireless handsets to share an incoming line. The switch knows if a specific dedicated land line is in use so it can roll to the shared trunk a second incoming call to that line, then use signaling to inform the node of the destination number. There may be multiple shared trunks to a given network node, and the central

10 office knows which are available and can use any idle trunk. If no trunks are idle the central office provides busy tone to the caller. In this embodiment the Network Node performs additional functions when a call is initiated by the telephone switch. Upon detecting start (off hook) on any trunk, the incoming call detector, 410, interrupts the processor, 402, via the bus, 408. The processor connects the codec, 414, associated with the incoming trunk through the switch, 416,

15 to an idle tone detector/generator. When this connection is made the processor causes the line termination to send a signal to the telephone switch indicating that the node is ready to receive destination information in the form of DTMF tones over the trunk. Some implementations of trunks may simply send digits after a time interval, eliminating the need for the response from the termination. In either case, the tone detector encodes received digits and sends them to the

20 processor via the bus. The received digits will be the telephone number to which the telephone switch desires to connect. In effect, the trunk represents a shared line whose destination may change from call to call. Once the processor is in possession of the called number, it proceeds as

in any incoming call, viz: it relates the incoming line (or, in this case, number) to a PIN and proceeds according to the class of service marks assigned to that PIN. At this point all features described earlier for incoming calls such as priority answers, privacy controls, and joining calls are possible. One possible arrangement for a database table which allocates shared and dedicated

5 lines is shown in Figure 12. Line 1201 shows a line which serves only (is dedicated to) PIN xxxx.

Line 1202 shows how a line is dedicated to a group of PINs, in this case aaaa, yyyy, and zzzz.

These 3 PINs have equal access to this line as if they were wired extension phones. Line 1203

shows a shared line which will be assigned to PIN bbbb if and only if the incoming code is xxxx. If the incoming code is yyyy, PIN cccc will be associated with this line for the duration of the call.

10 Line 1204 shows a second shared line, note that if the incoming code is xxxx this line can also be used by PIN bbbb, but PINs cccc and dddd are not allowed to use this line. Note that shared lines may be given a priority, P, which allows preemption and other service levels to be sold to the PINs sharing each line.

CLAIMS

We claim:

1. A wireless device for connecting to one or more network node devices, the network node devices connected to one or more wirelines, the wireless device comprising:

one or more wireless signal generators supporting one or more wireless connections;

one or more memories to store an identifier;

one or more negotiators that negotiate with the network node device in order to establish a connection to one or more wirelines connected to the network node; and

a a requesting process that requests bridging to a call in progress.

2. A wireless device for connecting to one or more network node devices, the network node devices connected to a plurality of wirelines, the wireless device comprising:

one or more wireless signal generators supporting one or more wireless connections;

one or more memories to store an identifier;

a negotiator that negotiates with the network node device in order to establish a

5 connection to one or more wirelines connected to the network node; and

a requestor that requests privacy.

3. A method of joining a call in progress from a wireless device through wireless communication
with a network node device comprising the steps of:

initiating a connection by the wireless device between the wireless device and the
network node device;

signaling the network node device by the wireless device to join a call in progress
already connected through said network node device; and

joining the call in progress.

15 4. The method of claim 3 further comprising the step of communicating with the network node
device to establish the eligibility of the wireless device to join a call in progress.

5. The method of claim 4 where the establishing eligibility of the wireless device includes:

use of the phone identifier of the handset requesting to join the call.

6. A method of establishing call privacy for a wireless device connected to a network node device comprising signaling by the wireless device to the network node device that privacy is requested.

5 7. The method of claim 6 further comprising the step of communicating with the network node device to establish the eligibility of the wireless device to request privacy.

8. A storage medium containing a computer program to direct a wireless device to initiate connection with a network node device, the computer program having the steps of:

signaling a desire for connection on at least one pre established command channel;

10 communicating of an identifier from the wireless device to the network node device;
selecting of a wireless signaling method to be used between the wireless device and the network node device; and

requesting bridging to a call in progress.

9. A storage medium containing a computer program to direct a wireless device to initiate
15 connection with a network node device, the computer program having the steps of:

**WIRELESS COMMUNICATIONS DEVICE AND METHOD FOR USE WITH
TELEPHONE NETWORK EDGE NODE PROVIDING BRIDGING AND PRIVACY**

ABSTRACT

5 A wireless device connects to one or more network node devices that are in turn connected to one or more wirelines. The wireless device has one or more wireless signal generators supporting one or more of the wireless connections and one or more memories to store an identifier. One or more negotiators negotiate with the network node device in order to establish a connection to one or more wirelines connected to the network node and a requesting process requests bridging to a call in progress.

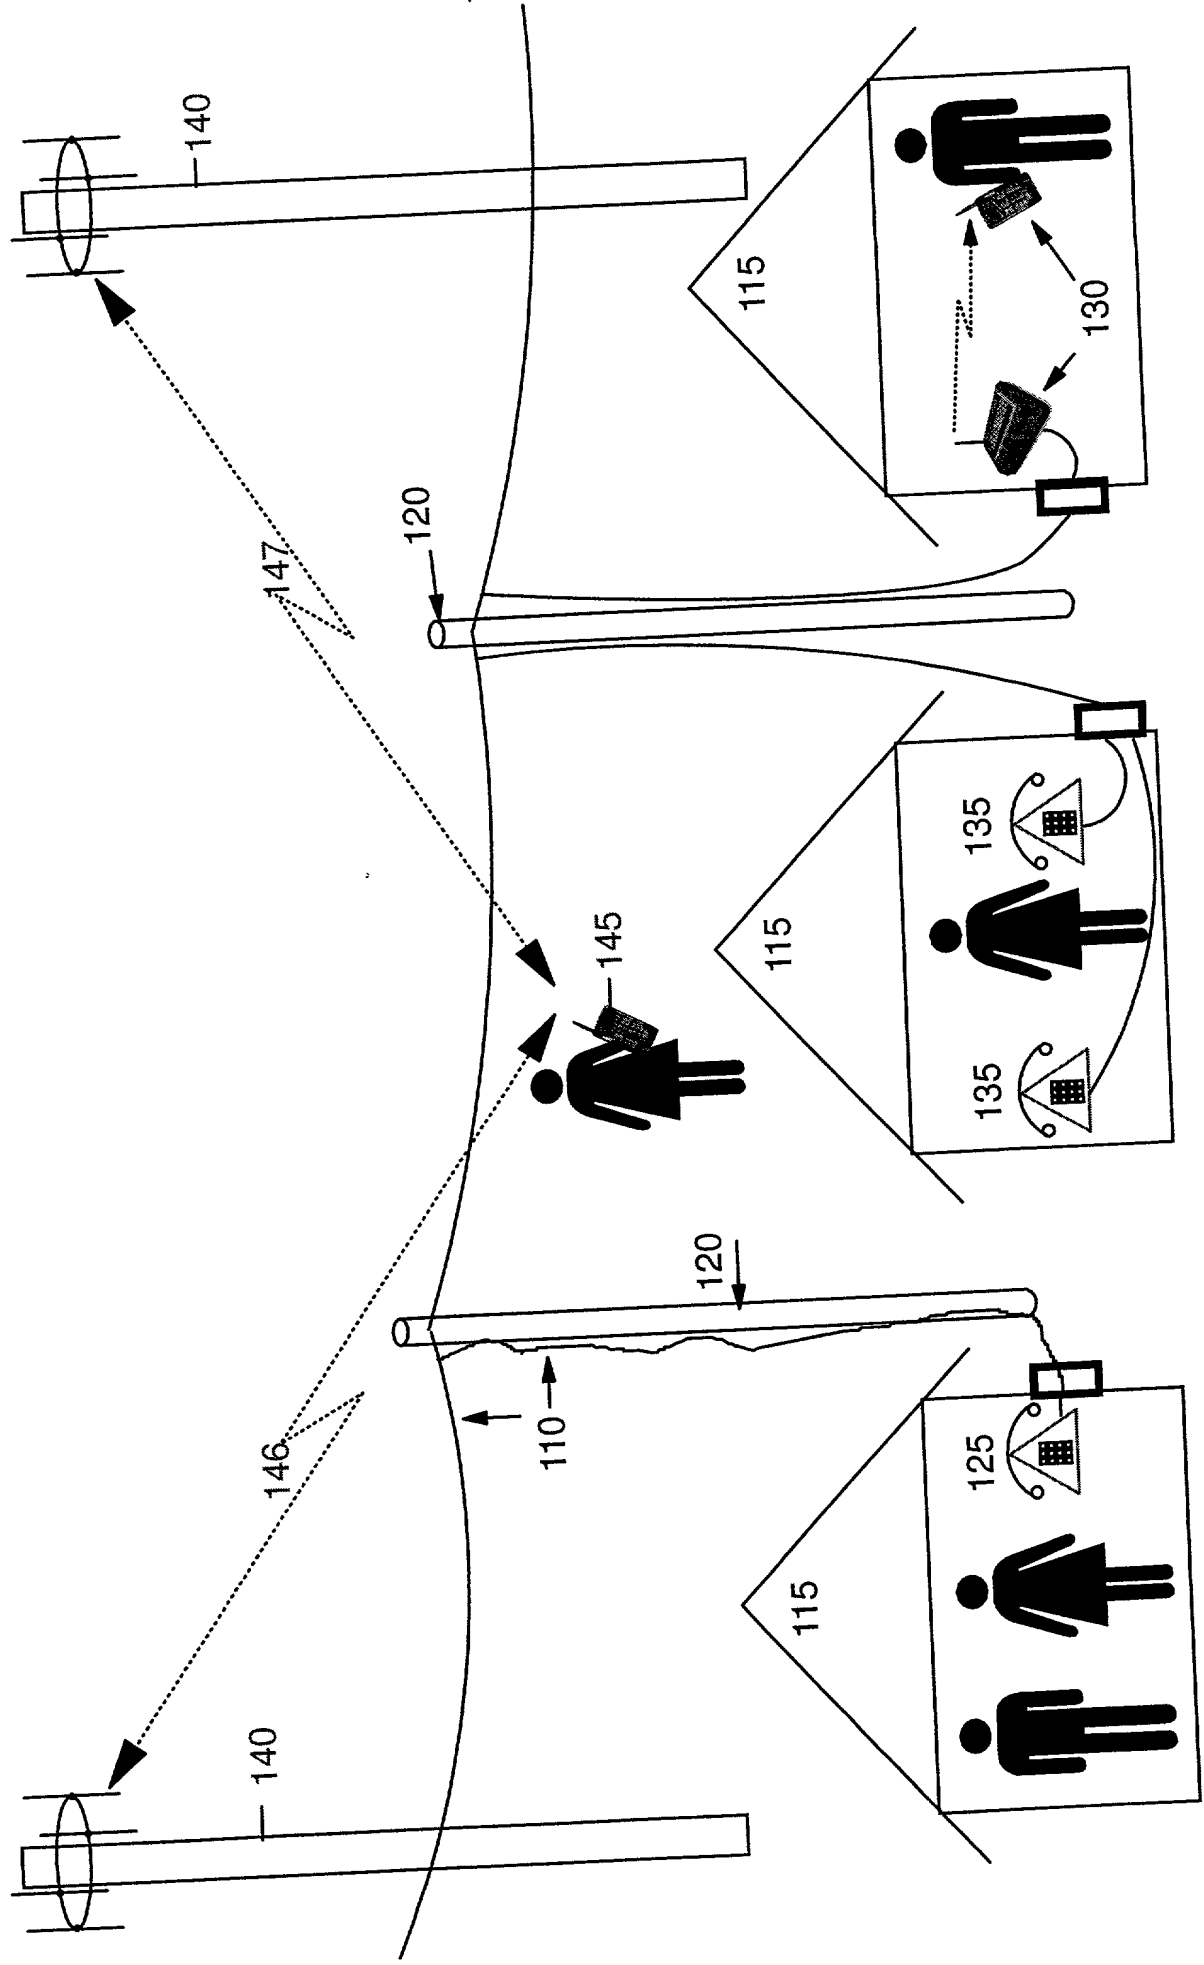


Figure 2: Inventive System with Wireless Network Node box

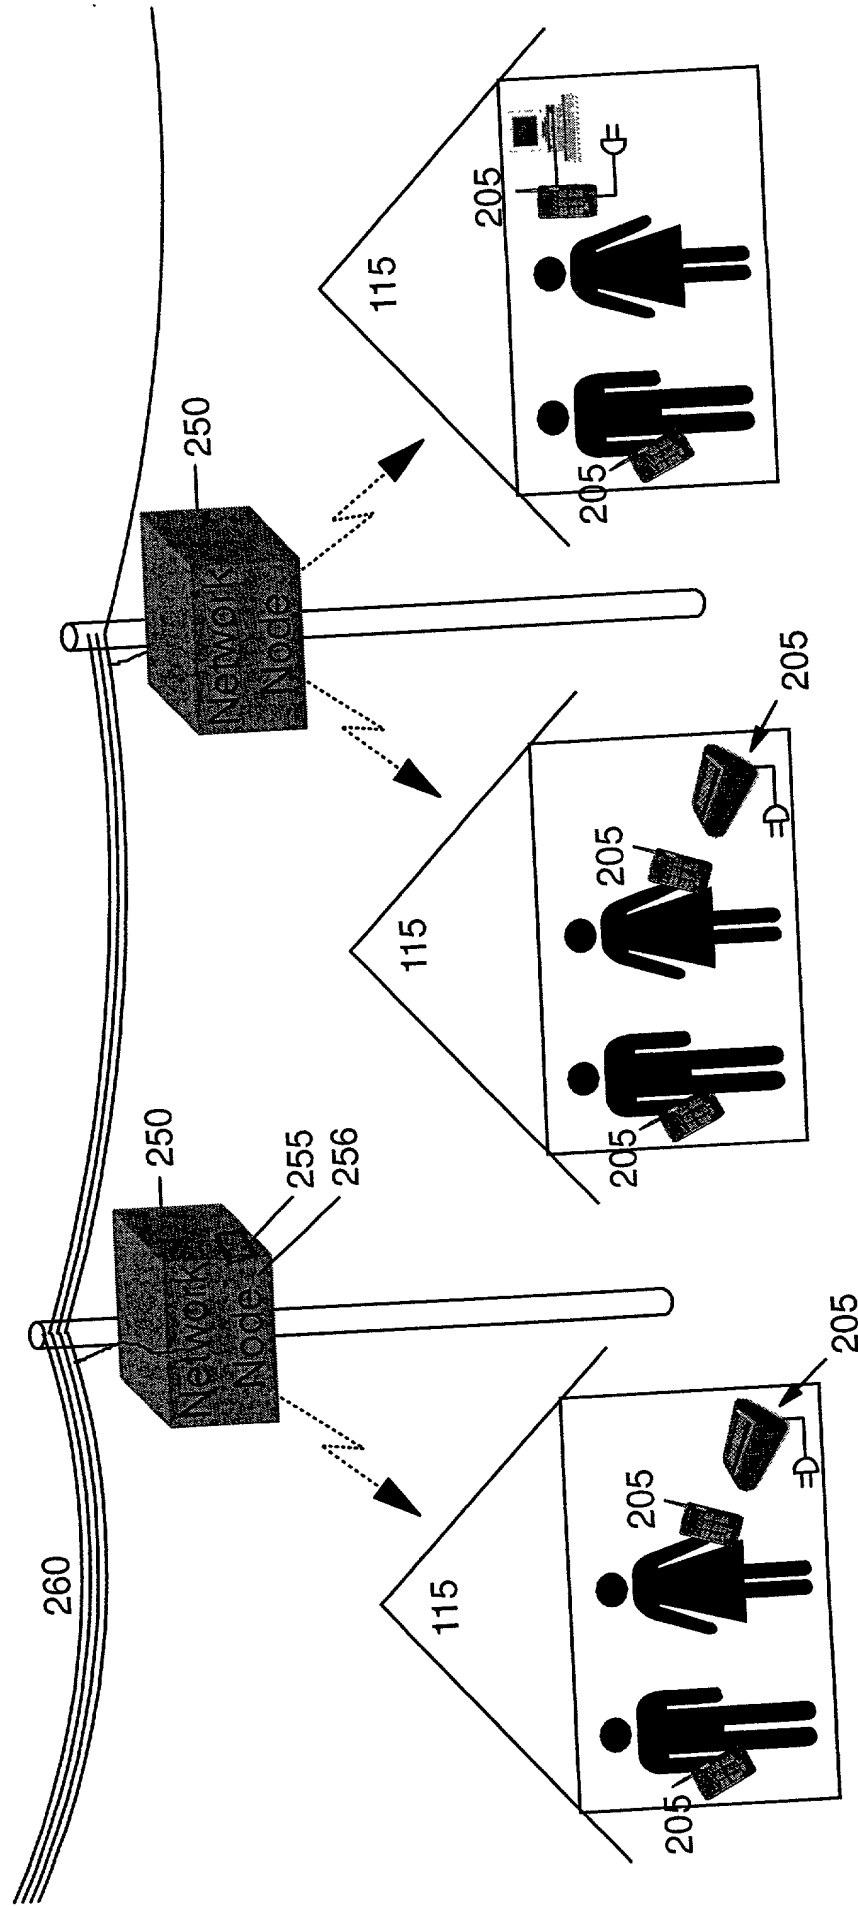


Figure 3 - Network Node Controller


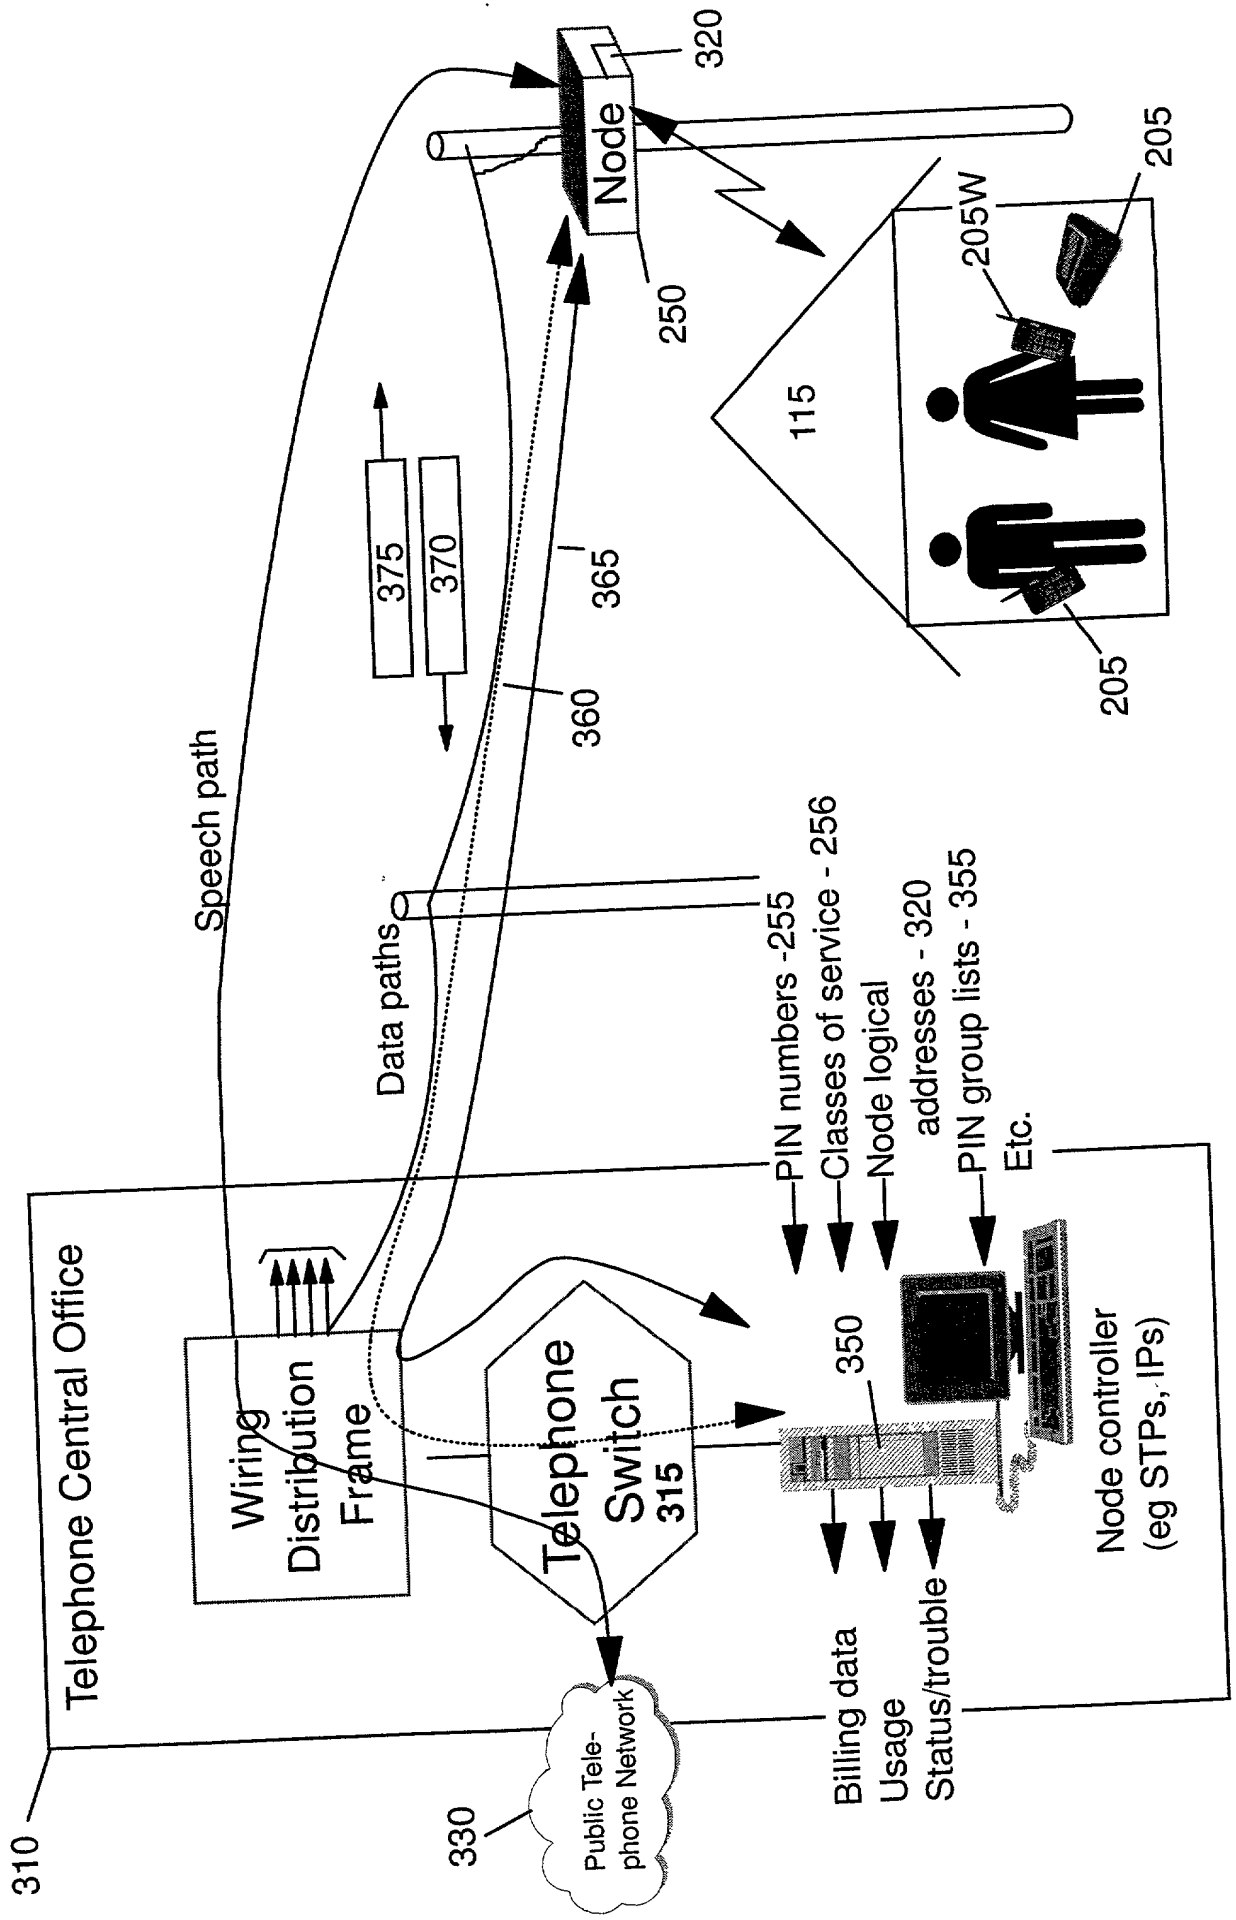


Figure 4. Telephone network node device

250

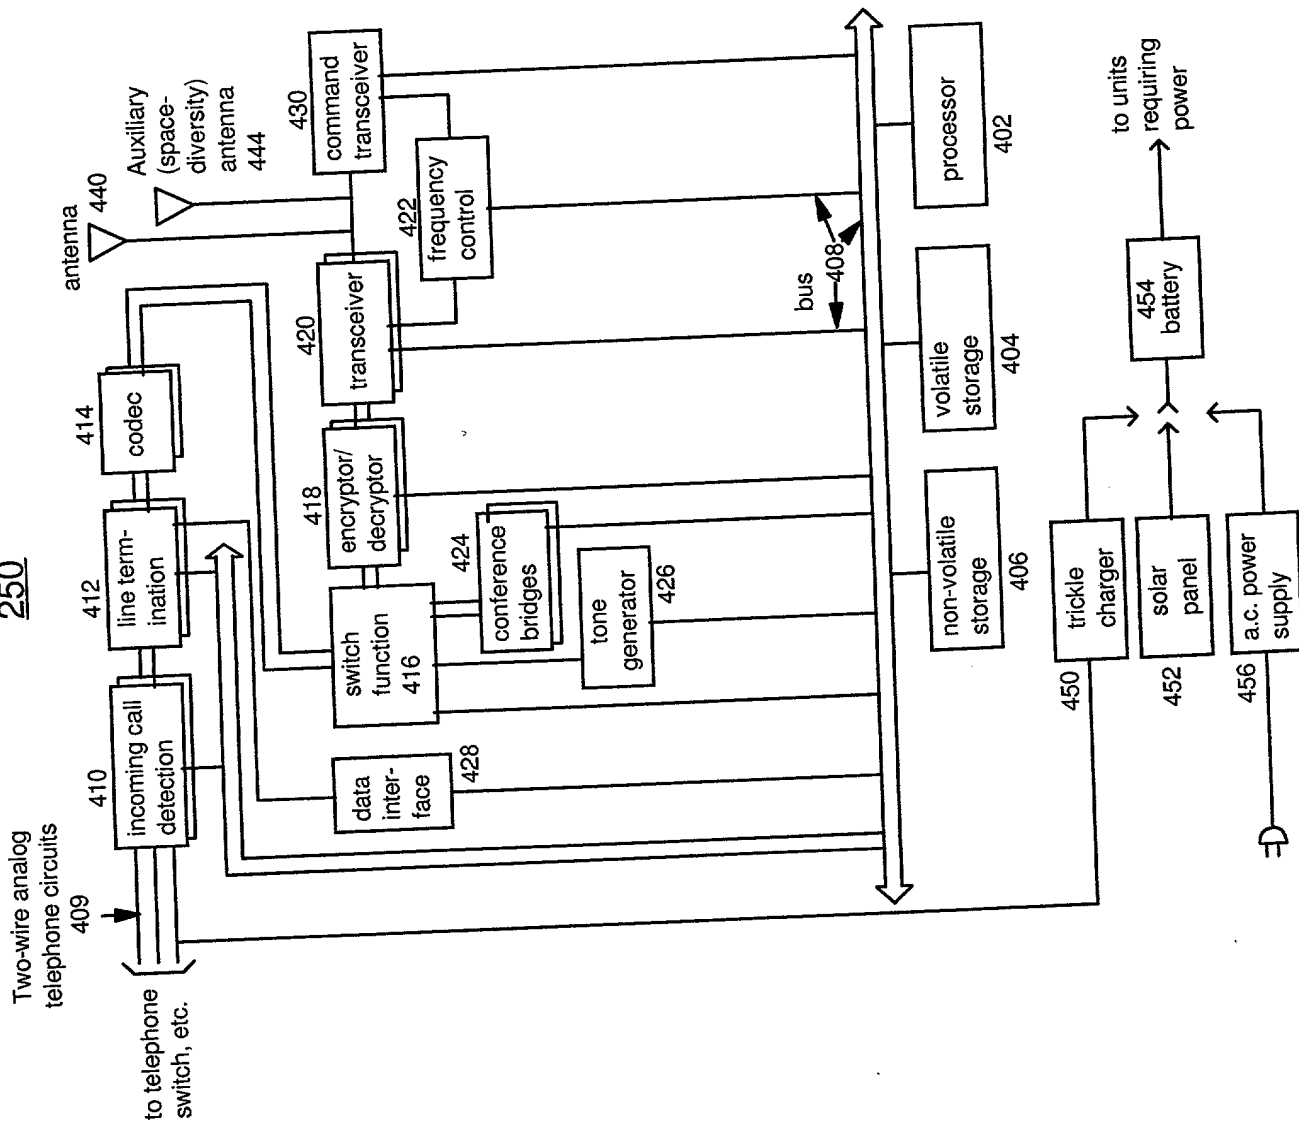

205W
Figure 5. Wireless communications device

205W

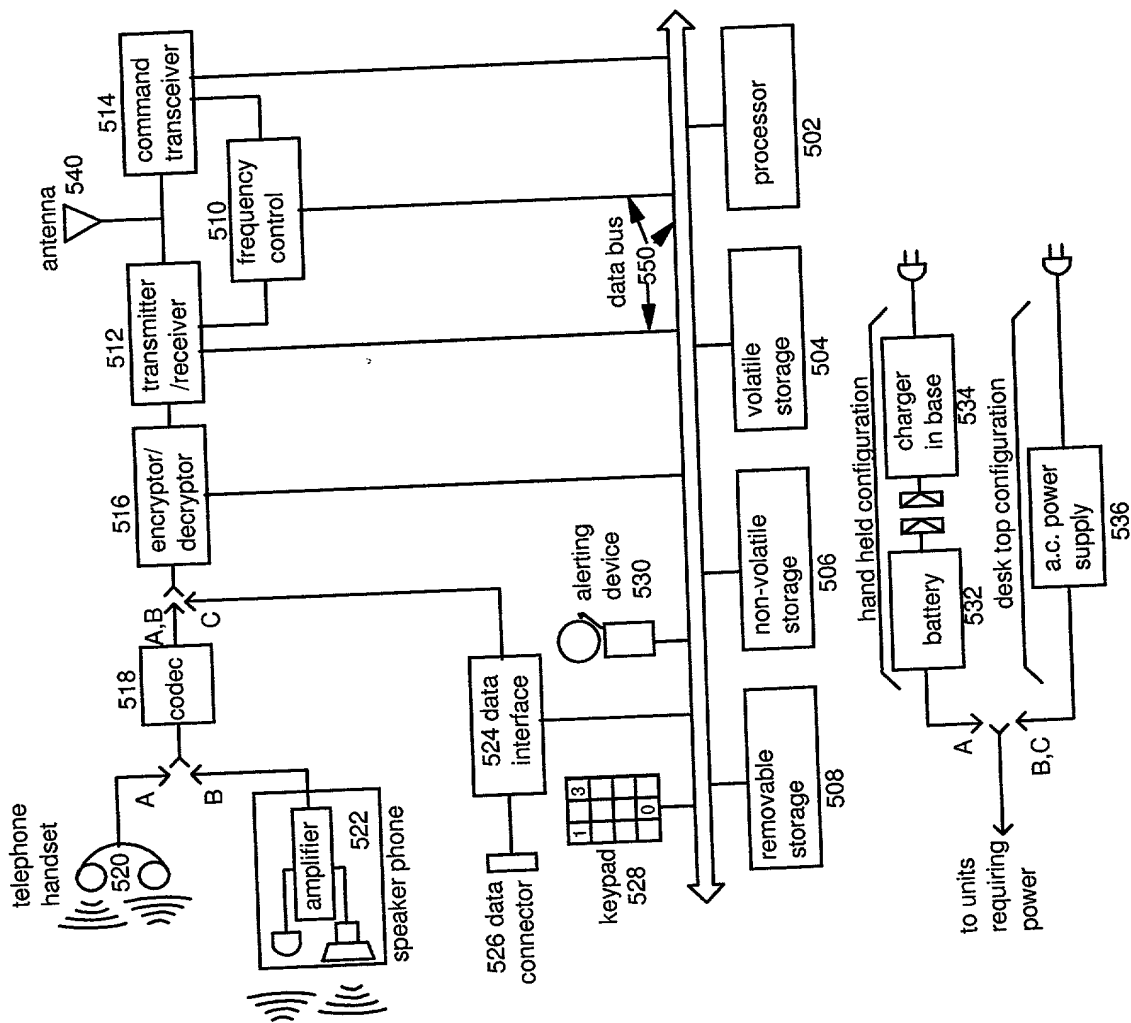


Fig 7. Alarm & Traffic reporting to Network Node Controller

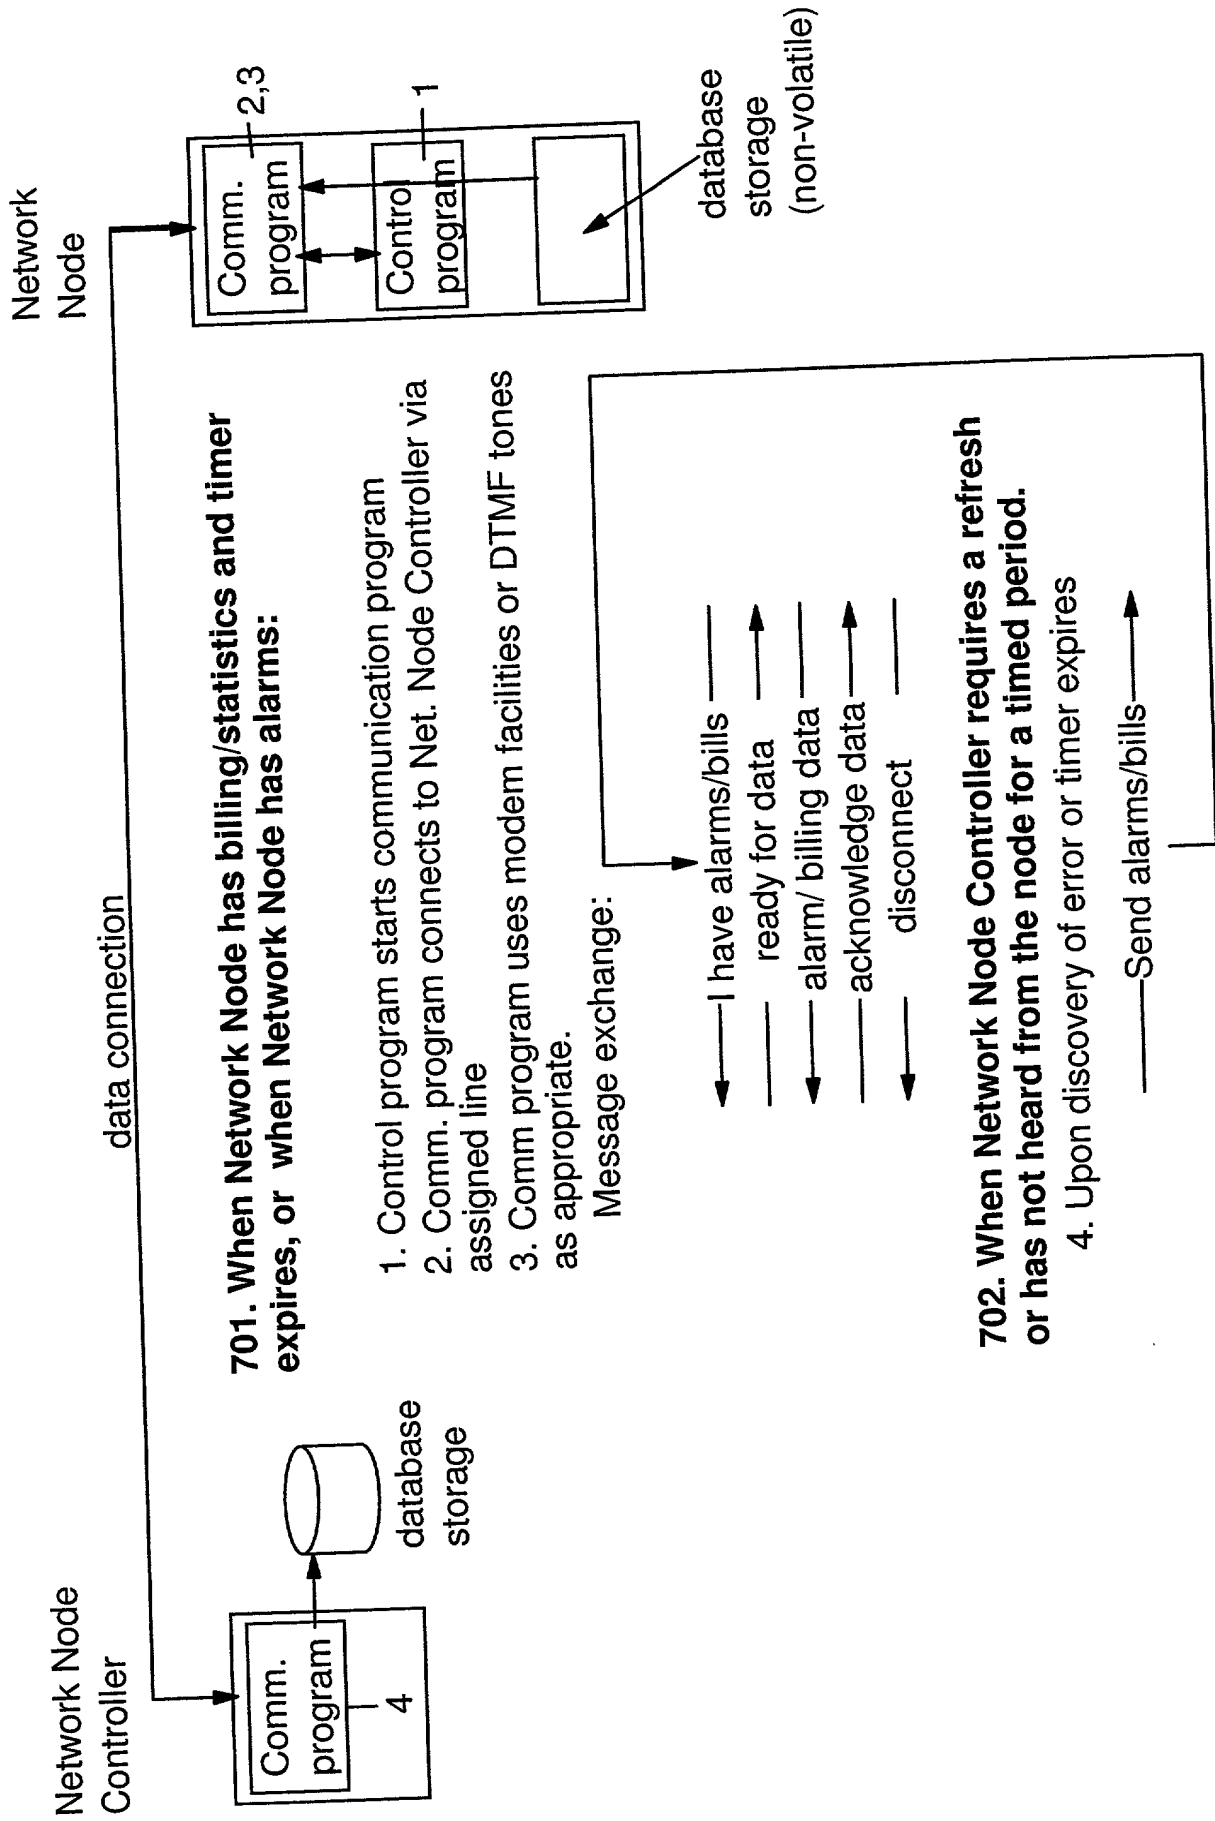


Figure 8. Initial setup - Network Node and Wireless Communication Device


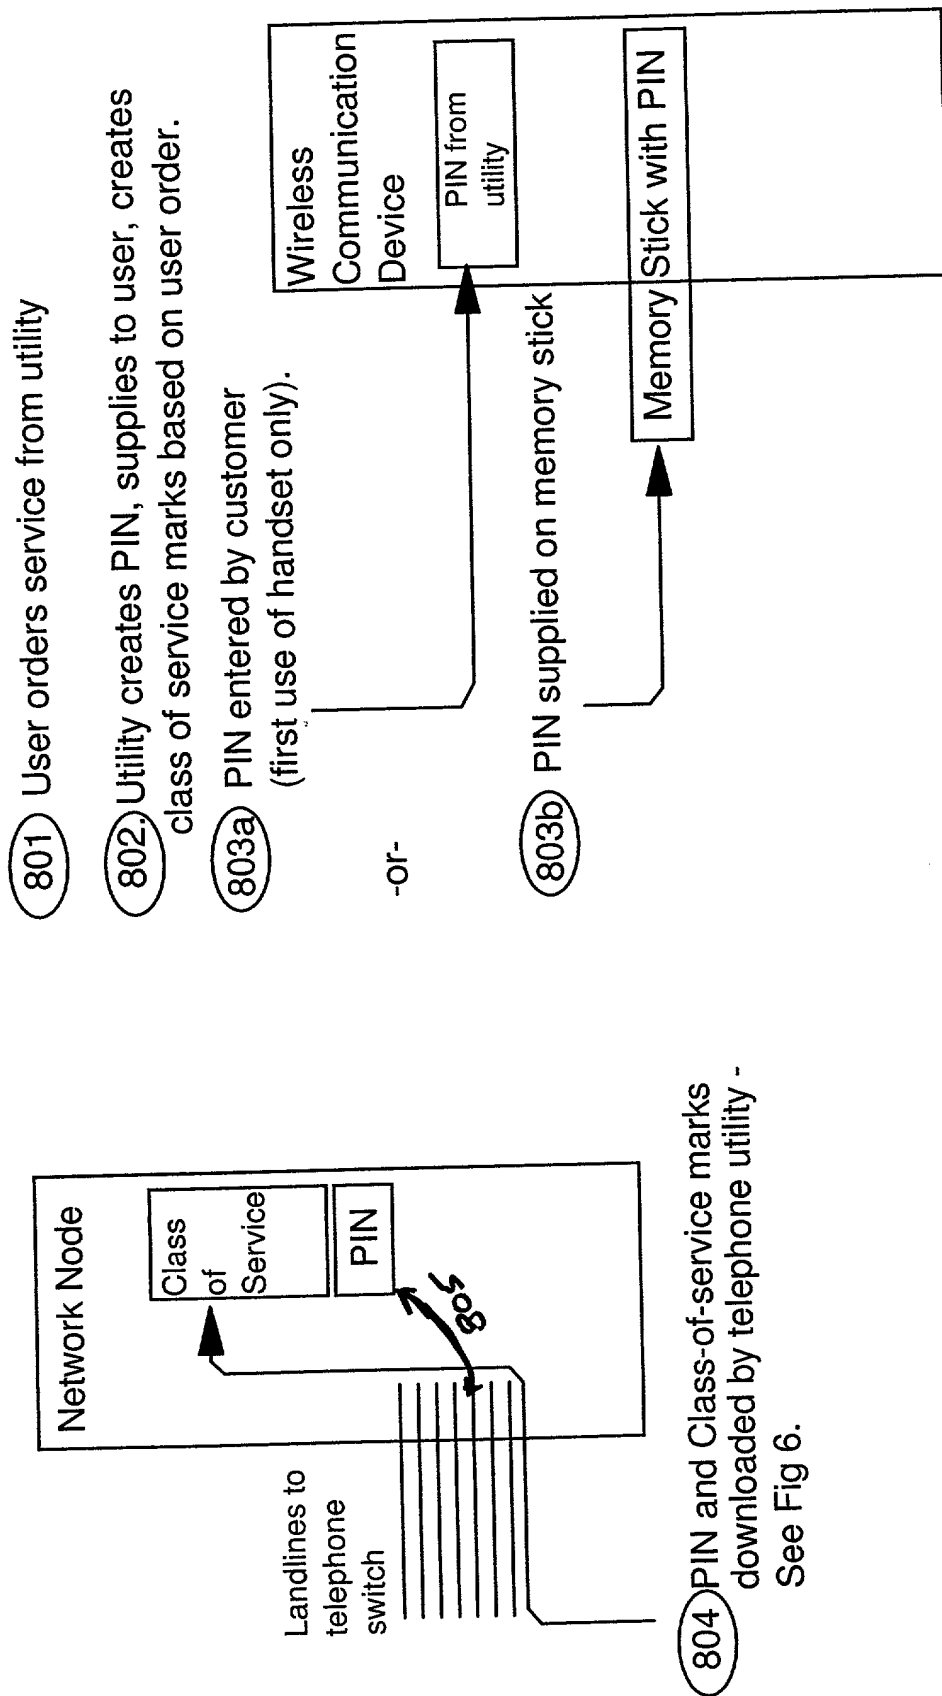


Figure 9. Connection process - Wireless Comm. Device to Network Node

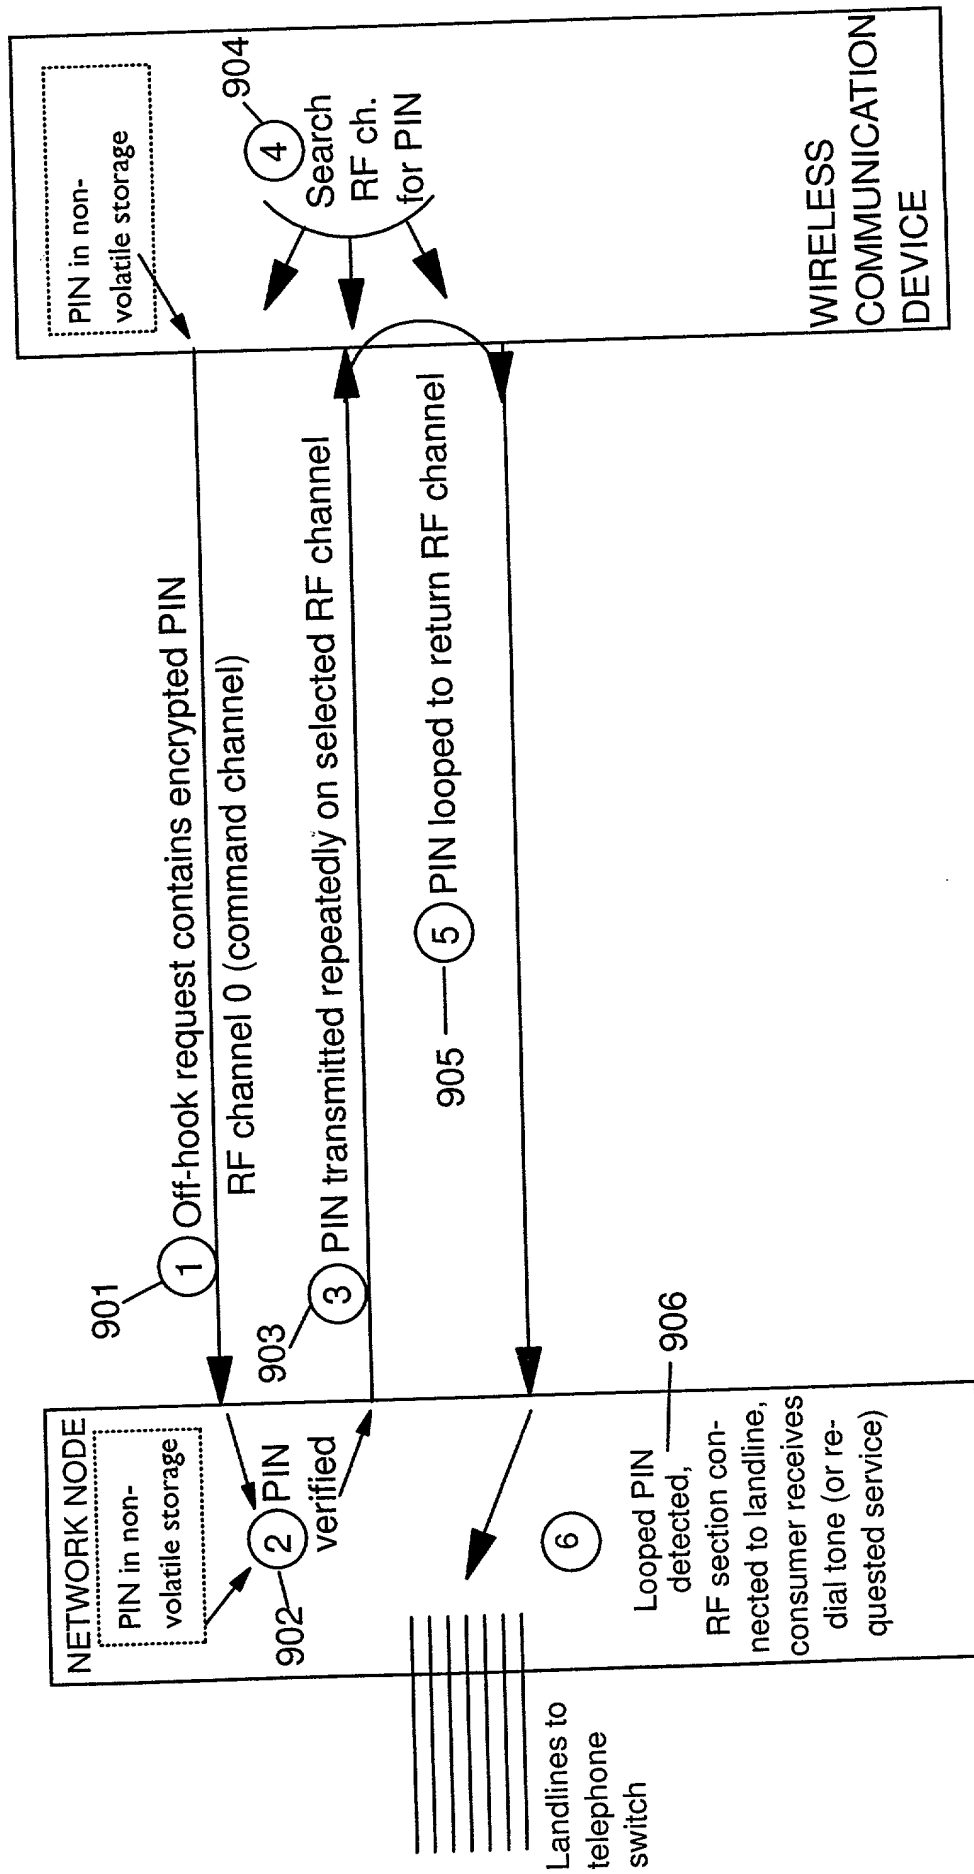

```

sequenceDiagram
    participant NN as NETWORK NODE 1001
    participant WCD as WIRELESS COMMUNICATION DEVICE(S) 1004
    Note over NN: 1 Incoming call detected, PIN(s) determined
    NN->>WCD: 2 Alert request broadcast to each PIN, specifies return RF channel to use
    Note over NN: Alerts to other PIN(s) if required
    WCD->>NN: 4 User responds to alert
    Note over WCD: 5 Off-hook request contains encrypted PIN
    WCD->>NN: 6 Search for first response
    NN->>WCD: 7 PIN transmitted repeatedly on selected RF channel
    WCD->>WCD: 8 PIN looped to return RF channel
    WCD->>NN: 9 Looped PIN detected, RF section connected to landline
  
```

9
Looped PIN
detected,
RF section con
nected to landli
call answered
conversation sta

Fig.11
Class of service table showing association of
services to PIN #

PIN #	First/only dedicated line # incoming/outgoing/both (additional dedicated line #, etc.)
	Last dedicated line # incoming/outgoing/both
	Privacy feature allowed
	Privacy feature during call
	Privacy disconnect allowed
	Privacy disconnect priority
	Bridging allowed
	Shared outgoing service allowed
	Shared outgoing service max lines
	Shared outgoing service access priority
	Shared outgoing service pre-empt priority
	Shared incoming line access number
	Shared incoming service max lines
	Call waiting notify never/always/newest/oldest
	Camp-on allowed
	Join allowed

Fig. 12
Association of dedicated and shared line(s) to PIN #s

Incoming entity	Priority	PIN assignment
Dedicated line 1		PIN xxxx
Dedicated line 2		PIN aaaa; PIN yyyy, PIN zzzz; etc.
...		...
Dedicated line N		PIN xxxx; (PIN yyyy; PIN zzzz; etc.)
Shared 1 Incoming code xxxx	p	PIN bbbb
Incoming code yyyy	p	PIN cccc
Incoming code zzzz	p	PIN dddd
....	
Shared 2 Incoming code xxxx	p	PIN bbbb
Incoming code bbbb	p	PIN eeee
....	
.....	
Shared N Incoming code 1111	p	PIN mmmm; (PIN yyyy; PIN zzzz; etc.)
Incoming code 2222	p	PIN nnnn; (PIN yyyy, PIN zzzz; etc.)
....	

1201

1202

1203

1204

Fig 13. Privacy process charts, part 1



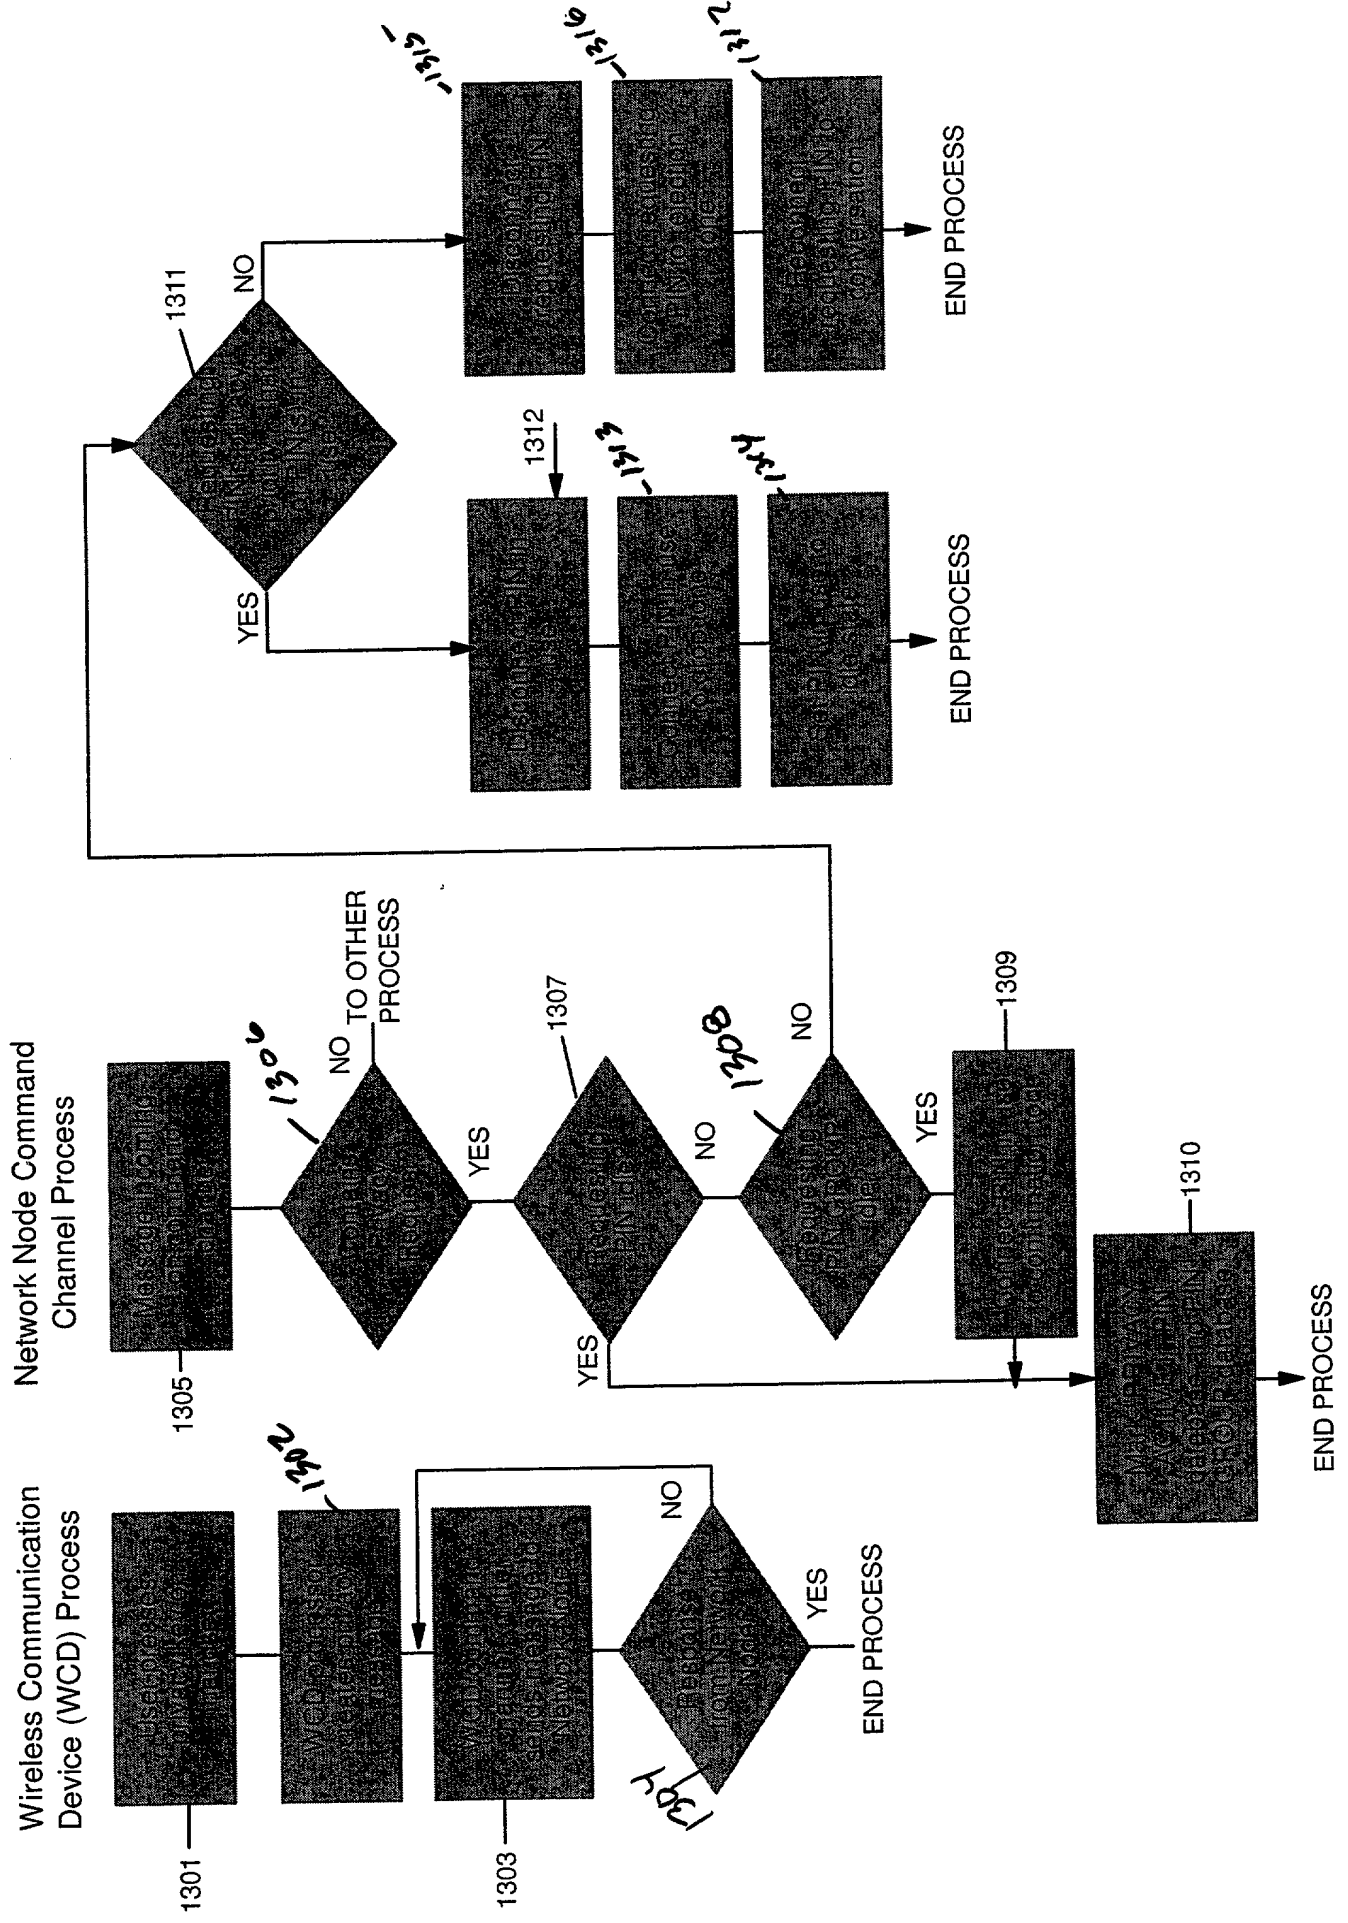


Fig 14. Privacy process charts, part 2

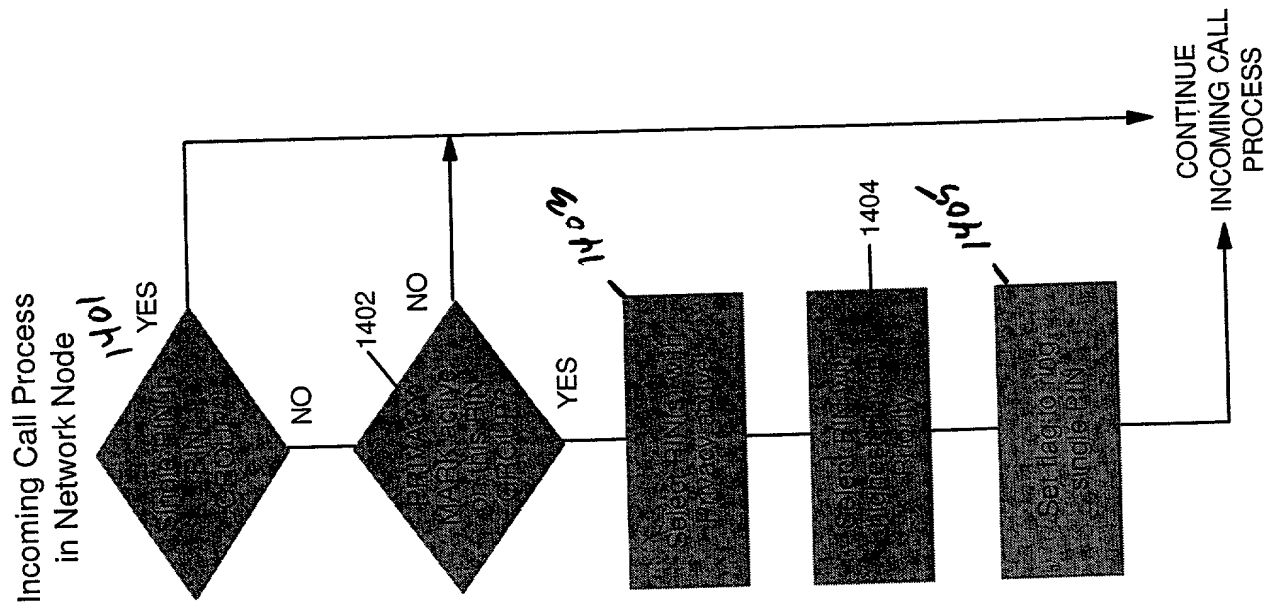

	mean	standard deviation	range
Age	34.2	10.5	21-54
Sex			
Male	10	10	1-20
Female	10	10	1-20
Marital status			
Married	10	10	1-20
Single	10	10	1-20
Divorced	10	10	1-20
Widowed	10	10	1-20
Never married	10	10	1-20
Other	10	10	1-20
Total	20	20	1-20
Education			
Less than high school	10	10	1-20
High school	10	10	1-20
Some college	10	10	1-20
Bachelor's degree	10	10	1-20
Master's degree	10	10	1-20
Doctorate	10	10	1-20
Other	10	10	1-20
Total	20	20	1-20
Occupation			
Unemployed	10	10	1-20
Homemaker	10	10	1-20
Student	10	10	1-20
Professional	10	10	1-20
Managerial	10	10	1-20
Technical	10	10	1-20
Other	10	10	1-20
Total	20	20	1-20
Religion			
None	10	10	1-20
Other	10	10	1-20
Total	20	20	1-20
Political affiliation			
Democrat	10	10	1-20
Republican	10	10	1-20
Other	10	10	1-20
Total	20	20	1-20
Health status			
Excellent	10	10	1-20
Very good	10	10	1-20
Good	10	10	1-20
Fair	10	10	1-20
Poor	10	10	1-20
Total	20	20	1-20



P.26/29

Docket No. YOR920000633US1

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

WIRELESS COMMUNICATIONS DEVICE FOR USE WITH TELEPHONE NETWORK EDGE NODE PROVIDING BRIDGING AND PRIVACY
the specification of which (check one)

x is attached hereto.

_____ was filed on _____ as United States Application Number _____

or PCT International Application Number _____

and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application, having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed
------------------------------	------------------

(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. §120 of any United States Application(s), or §265(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States, or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

Manny W. Schechter (Reg. 31,722), Lauren Bruzzone (35,082), Christopher A. Hughes (Reg. 26,914), Edward A. Pennington (Reg. 32,588), John E. Hoel (Reg. 26,279), Joseph C. Redmond, Jr. (Reg. 18,753), Douglas W. Cameron (Reg. 31,596), Louis P. Herzberg (Reg. 41,500), Stephen C. Kaufman (Reg. 29,551), Daniel P. Morris (Reg. 32,053), Louis J. Percello (Reg. 33,206), David M. Shofi (Reg. 39,835), Robert M. Trepp (Reg. 25,933), Paul J. Otterstedt (Reg. 37,411), Wayne L. Ellenbogen (43,602) and Marian Underweiser (Reg. 46,134)

Send Correspondence to: Louis J. Parcello, Intellectual Property Law Dept.

IBM Corporation, P.O. Box 218, Yorktown Heights, New York 10598

Direct Telephone Calls to: (name and telephone number) Louis J. Parcelllo (914) 945-3145

Robert Ellis Chapman, Jr.

Full name of sole or first inventor

Inventor's Signature Robert E. Chynoweth Date 15 Sept 2000

2024 Lodestar Drive, Raleigh, North Carolina 27615

Residence

USA

Citizenship

same as above

Post Office Address

Express Label EL677441408US
Date of Deposit: Sept. 18, 2000

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Docket No. YOR920000633US1

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

WIRELESS COMMUNICATIONS DEVICE FOR USE WITH TELEPHONE NETWORK EDGE NODE PROVIDING BRIDGING AND PRIVACY
the specification of which (check one)

☒ is attached hereto.

_____ was filed on _____ as United States Application Number

or PCT International Application Number _____

and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application, having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
_____	_____
_____	_____

I hereby claim the benefit under 35 U.S.C. §120 of any United States Application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States, or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
_____	_____	_____
_____	_____	_____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

Manny W. Schecter (Reg. 31,722), Lauren Bruzzone (35,082), Christopher A. Hughes (Reg. 26,914), Edward A. Pennington (Reg. 32,588), John E. Hoel (Reg. 26,279), Joseph C. Redmond, Jr. (Reg. 18,753), Douglas W. Cameron (Reg. 31,596), Louis P. Herzberg (Reg. 41,500), Stephen C. Kaufman (Reg. 29,551), Daniel P. Morris (Reg. 32,053), Louis J. Percello (Reg. 33,206), David M. Shofi (Reg. 39,835), Robert M. Trepp (Reg. 25,933), Paul J. Otterstedt (Reg. 37,411), Wayne L. Ellenbogen (43,602) and Marian Underweiser (Reg. 46,134)

Send Correspondence to: Louis J. Percello, Intellectual Property Law Dept.

IBM Corporation, P.O. Box 218, Yorktown Heights, New York 10598

Direct Telephone Calls to: (name and telephone number) Louis J. Percello (914)945-3145

Robert Ellis Chapman, Jr.

Full name of sole or first inventor

Inventor's Signature

Date

2024 Lodestar Drive, Raleigh, North Carolina 27615

Residence

USA

Citizenship

same as above

Post Office Address

Express Label EL677441408US
Date of Deposit: Sept. 18, 2000

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Edith Helen Stern

Full name of second joint-inventor, if any

Edith Helen Stern

Inventor's signature

9/15/00

Date

661 Hanover Street, Yorktown Heights, New York 10598

Residence

USA

Citizenship

Post Office Address

Barry E. Willner

Full name of third joint-inventor, if any

Barry E. Willner

Inventor's signature

9/15/2000

Date

365 Pine Road, Briarcliff Manor, New York 10510

Residence

USA

Citizenship

Post Office Address

Full name of fourth joint-inventor, if any

Inventor's Signature

Date

Residence

Citizenship

Post Office Address

Full name of fifth joint inventor, if any

Inventor's Signature

Date

Residence

Citizenship

Post Office Address

Full name of sixth joint-inventor, if any

Inventor's signature

Date

Residence

Citizenship

Post Office Address